



## 1-STEP MACADAM 5050 LED STRIP

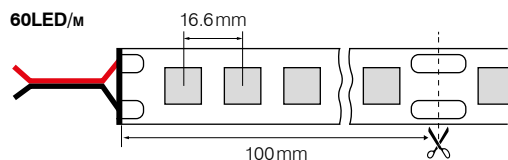

Abmessungen/Dimensions	5000mm
Leuchtmittel/Light source	SMD 5050
Lichtstrom /Luminous Flux	470 – 1100lm/m
Leistung/Wattage	7.2 – 14.4w/m
Anzahl LEDs/LED Qty	30, 60LED/m
IP-Schutzart/IP-Protection	IP20, IP67
Schutzklasse/Protection Class	III

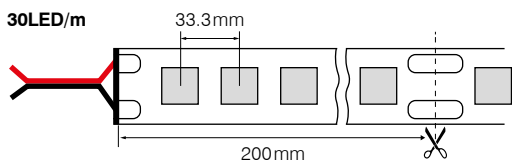

Artikelnummer Article Number	IP IP	LEDs/m LED s/m	CRI CRI	Teilungsmaß Cutting unit	Leistung Wattage	PCB Breite PCB Width	Farbe Color	Lichtstrom Luminous Flux
<b>Constant Current Strips</b>								
P5050Y060CM-27	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	2700K	900lm/m
P5050Y060CM-30	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	3000K	1000lm/m
P5050Y060CM-40	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	4000K	1050lm/m
P5050Y060CM-50	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	5000K	1075lm/m
P5050Y060CM-60	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	6000K	1100lm/m
P5050Z060CM-27	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	2700K	900lm/m
P5050Z060CM-30	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	3000K	1000lm/m
P5050Z060CM-40	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	4000K	1050lm/m
P5050Z060CM-50	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	5000K	1075lm/m
P5050Z060CM-60	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	6000K	1100lm/m

## 1-STEP MACADAM 5050 LED STRIP

Artikelnummer Article Number	IP IP	LED s/m LED s/m	CRI CRI	Teilungsmaß Cutting unit	Leistung Wattage	PCB Breite PCB Width	Farbe Color	Lichtstrom Luminous Flux
<b>Constant Voltage Strips</b>								
P5050Y060M-27	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	☐ 2700K	900lm/m
P5050Y060M-30	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	☐ 3000K	1000lm/m
P5050Y060M-40	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	☐ 4000K	1050lm/m
P5050Y060M-50	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	☐ 5000K	1075lm/m
P5050Y060M-60	IP20	60LED/m	CRI>90	100mm	14.4W/m	10mm	☐ 6000K	1100lm/m
P5050Z060M-27	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	☐ 2700K	900lm/m
P5050Z060M-30	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	☐ 3000K	1000lm/m
P5050Z060M-40	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	☐ 4000K	1050lm/m
P5050Z060M-50	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	☐ 5000K	1075lm/m
P5050Z060M-60	IP67	60LED/m	CRI>90	100mm	14.4W/m	12mm	☐ 6000K	1100lm/m
P5050Y030M-27	IP20	30LED/m	CRI>90	200mm	7.2w/m	10mm	☐ 2700K	500lm/m
P5050Y030M-30	IP20	30LED/m	CRI>90	200mm	7.2w/m	10mm	☐ 3000K	540lm/m
P5050Y030M-40	IP20	30LED/m	CRI>90	200mm	7.2w/m	10mm	☐ 4000K	560lm/m
P5050Y030M-50	IP20	30LED/m	CRI>90	200mm	7.2w/m	10mm	☐ 5000K	570lm/m
P5050Y030M-60	IP20	30LED/m	CRI>90	200mm	7.2w/m	10mm	☐ 6000K	590lm/m
P5050Z030M-27	IP67	30LED/m	CRI>90	200mm	7.2w/m	12mm	☐ 2700K	485lm/m
P5050Z030M-30	IP67	30LED/m	CRI>90	200mm	7.2w/m	12mm	☐ 3000K	525lm/m
P5050Z030M-40	IP67	30LED/m	CRI>90	200mm	7.2w/m	12mm	☐ 4000K	545lm/m
P5050Z030M-50	IP67	30LED/m	CRI>90	200mm	7.2w/m	12mm	☐ 5000K	560lm/m
P5050Z030M-60	IP67	30LED/m	CRI>90	200mm	7.2w/m	12mm	☐ 6000K	570lm/m