

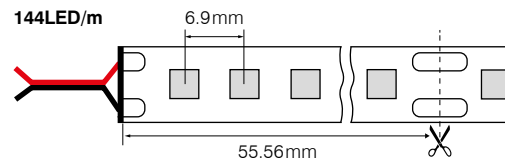


**NEW**

## 200LM/W 5050 LED STRIP

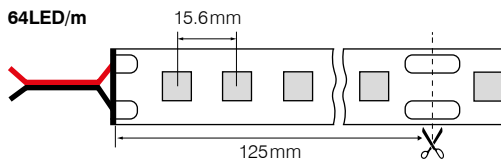

Abmessungen/Dimensions	5000mm
Leuchtmittel/Light source	SMD 5050
Lichtstrom /Luminous Flux	1850 – 5100lm/m
Leistung/Wattage	11.5 – 25W/m
Anzahl LEDs/LED Qty	64, 144LED/m
IP-Schutzartart/IP-Protection	IP20, IP67
Schutzklasse/Protection Class	III



Artikelnummer Article Number	IP IP	LED s/m LED s/m	CRI CRI	Teilungsmaß Cutting unit	Leistung Wattage	PCB Breite PCB Width	Farbe Color	Lichtstrom Luminous Flux
<b>Constant Current Strips</b>								
P5050Y144CH-27	IP20	144LED/m	CRI>80	55.56mm	25W/m	15mm	2700K	4300lm/m
P5050Y144CH-30	IP20	144LED/m	CRI>80	55.56mm	25W/m	15mm	3000K	4800lm/m
P5050Y144CH-40	IP20	144LED/m	CRI>80	55.56mm	25W/m	15mm	4000K	5000lm/m
P5050Y144CH-60	IP20	144LED/m	CRI>80	55.56mm	25W/m	15mm	6000K	5100lm/m
P5050Z144CH-27	IP67	144LED/m	CRI>80	55.56mm	25W/m	17mm	2700K	4200lm/m
P5050Z144CH-30	IP67	144LED/m	CRI>80	55.56mm	25W/m	17mm	3000K	4700lm/m
P5050Z144CH-40	IP67	144LED/m	CRI>80	55.56mm	25W/m	17mm	4000K	4900lm/m
P5050Z144CH-60	IP67	144LED/m	CRI>80	55.56mm	25W/m	17mm	6000K	5000lm/m
P5050Y064CH-27	IP20	64LED/m	CRI>80	125mm	11.5W/m	10mm	2700K	1900lm/m
P5050Y064CH-30	IP20	64LED/m	CRI>80	125mm	11.5W/m	10mm	3000K	2100lm/m
P5050Y064CH-40	IP20	64LED/m	CRI>80	125mm	11.5W/m	10mm	4000K	2300lm/m
P5050Y064CH-60	IP20	64LED/m	CRI>80	125mm	11.5W/m	10mm	6000K	2400lm/m
P5050Z064CH-27	IP67	64LED/m	CRI>80	125mm	11.5W/m	12mm	2700K	1850lm/m
P5050Z064CH-30	IP67	64LED/m	CRI>80	125mm	11.5W/m	12mm	3000K	2050lm/m
P5050Z064CH-40	IP67	64LED/m	CRI>80	125mm	11.5W/m	12mm	4000K	2250lm/m
P5050Z064CH-60	IP67	64LED/m	CRI>80	125mm	11.5W/m	12mm	6000K	2350lm/m