

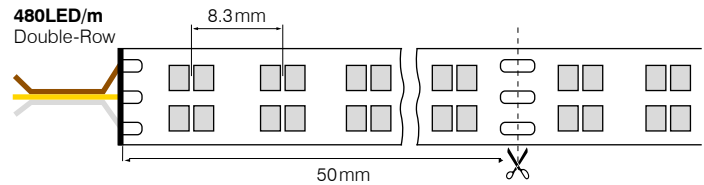


1-STEP MC ADAM CRI>90 TUNEABLE WHITE 2216 LED STRIP

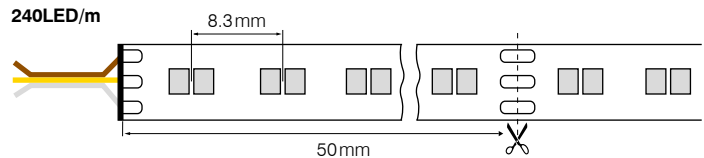

Abmessungen/Dimensions	5000mm
Leuchtmittel/Light source	SMD 2216
Lichtstrom /Luminous Flux	1670 – 3440lm/m
Leistung/Wattage	19.2 – 38.4W/m
Anzahl LEDs/LED Qty	240LED/m, 480LED/m (Double Row)
IP-Schutzartart/IP-Protection	IP20, IP67
Schutzklasse/Protection Class	III



Artikelnummer Article Number	IP IP	LEDs/m LED s/m	CRI CRI	Teilungsmaß Cutting unit	Leistung Wattage	PCB Breite PCB Width	Farbe Color	Lichtstrom Luminous Flux
Constant Voltage Strips								
P2216Y240TM-274	IP20	240LED/m	CRI>90	50mm	19.2W/m	10mm	☐ 2700K - ☐ 4000K	1690 lm/m
P2216Y240TM-275	IP20	240LED/m	CRI>90	50mm	19.2W/m	10mm	☐ 2700K - ☐ 5000K	1700 lm/m
P2216Y240TM-276	IP20	240LED/m	CRI>90	50mm	19.2W/m	10mm	☐ 2700K - ☐ 6000K	1720 lm/m
P2216Y240TM-304	IP20	240LED/m	CRI>90	50mm	19.2W/m	10mm	☐ 3000K - ☐ 4000K	1695 lm/m
P2216Y240TM-305	IP20	240LED/m	CRI>90	50mm	19.2W/m	10mm	☐ 3000K - ☐ 5000K	1710 lm/m
P2216Y240TM-306	IP20	240LED/m	CRI>90	50mm	19.2W/m	10mm	☐ 3000K - ☐ 6000K	1720 lm/m
P2216Z240TM-274	IP67	240LED/m	CRI>90	50mm	19.2W/m	12mm	☐ 2700K - ☐ 4000K	1680 lm/m
P2216Z240TM-275	IP67	240LED/m	CRI>90	50mm	19.2W/m	12mm	☐ 2700K - ☐ 5000K	1690 lm/m
P2216Z240TM-276	IP67	240LED/m	CRI>90	50mm	19.2W/m	12mm	☐ 2700K - ☐ 6000K	1710 lm/m
P2216Z240TM-304	IP67	240LED/m	CRI>90	50mm	19.2W/m	12mm	☐ 3000K - ☐ 4000K	1685 lm/m
P2216Z240TM-305	IP67	240LED/m	CRI>90	50mm	19.2W/m	12mm	☐ 3000K - ☐ 5000K	1700 lm/m
P2216Z240TM-306	IP67	240LED/m	CRI>90	50mm	19.2W/m	12mm	☐ 3000K - ☐ 6000K	1710 lm/m
P2216Y480TM-274	IP20	480LED/m (Double Row)	CRI>90	50mm	38.4W/m	12mm	☐ 2700K - ☐ 4000K	3380 lm/m
P2216Y480TM-275	IP20	480LED/m (Double Row)	CRI>90	50mm	38.4W/m	12mm	☐ 2700K - ☐ 5000K	3400 lm/m
P2216Y480TM-276	IP20	480LED/m (Double Row)	CRI>90	50mm	38.4W/m	12mm	☐ 2700K - ☐ 6000K	3440 lm/m
P2216Y480TM-304	IP20	480LED/m (Double Row)	CRI>90	50mm	38.4W/m	12mm	☐ 3000K - ☐ 4000K	3390 lm/m
P2216Y480TM-305	IP20	480LED/m (Double Row)	CRI>90	50mm	38.4W/m	12mm	☐ 3000K - ☐ 5000K	3420 lm/m
P2216Y480TM-306	IP20	480LED/m (Double Row)	CRI>90	50mm	38.4W/m	12mm	☐ 3000K - ☐ 6000K	3440 lm/m