




AMBOS Up+Down

Wall luminaire

Wall luminaire with power LEDs. The luminaire is optimized for glare-free accent lighting of walls and columns or pillars. Perfect as well as an energetic exchange of conventional systems.

Lamp	2x Bridgelux Vero 18
LED lumen output	1600 lm @ 350 mA – 9,3 W
The reference values based on 3000 K with CRI 80	2250 lm @ 500 mA – 13,5 W
Light technology	Reflector, aluminium specular anodize
Control gear	LED driver internal
Dimming (options)	1–10 V, DALI, Push
Luminaire type, mounting	Wall luminaire, surface-mounted
Dimensions	HxWxT 250x100x142 mm
Cast, heat sink	Powder coated sheet steel, extruded aluminium profile anodized black
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20, CE
Specials	Customized versions, more light colours or colour renderings on request

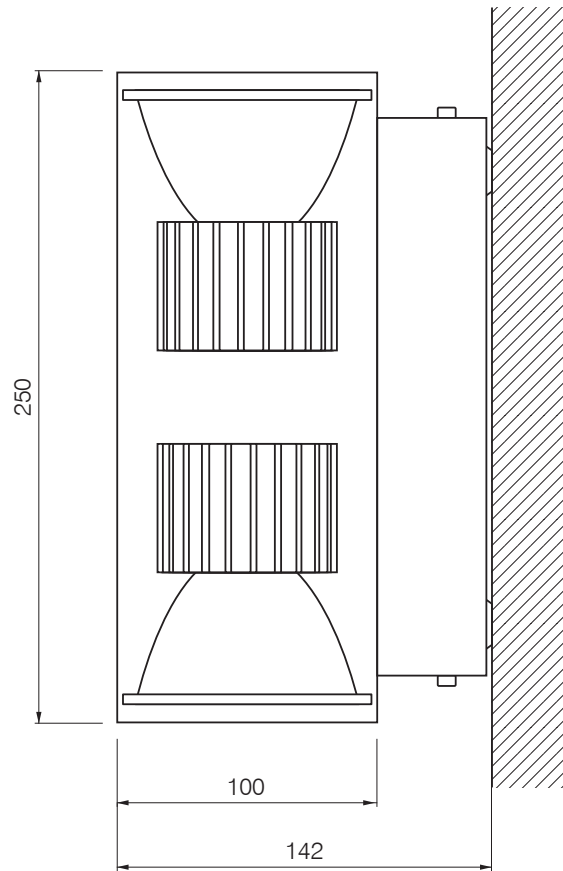

on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1-10 V, DALI, Push	K 9101 K 2780 XX 9016	
		CRI 90	1-10 V, DALI, Push	K 9101 K 2790 XX 9016	
	3000 K	CRI 80	1-10 V, DALI, Push	K 9101 K 3080 XX 9016	
		CRI 90	1-10 V, DALI, Push	K 9101 K 3090 XX 9016	
	4000 K	CRI 80	1-10 V, DALI, Push	K 9101 K 4080 XX 9016	
	5000 K	CRI 70	1-10 V, DALI, Push	K 9101 K 4080 XX 9016	