



FFF L3

Outdoor luminaire

The wall-mounted luminaire is optimised for a flat and glare-free illumination of the outdoor area.


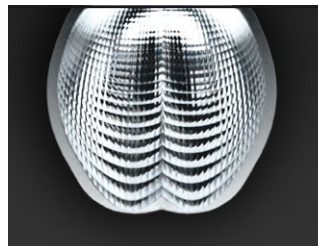


Foto: Bartenbach GmbH

Reflector with complexed faceted surface for precise light and glare control.

Lamp	3 x High power LED, 6W bei 500mA pro LED
Lumen output	ca. 700lm @ 2700K / 3000K (CRI 80), ca. 720lm @ 4000k (CRI 90)
Lighting technology	Reflector: Plastic aluminized
Control gear	LED driver internal
Dimming (options)	1–10 V, DALI, Push
Luminaire type, assembly	Wall-mounted
Dimensions	W = 180mm, L = 285mm, H = 190mm
Cast, heat sink	Aluminium
Colour / finish	Powder coating, RAL 9007 fs (optional RAL color as desired)
Protection marking, compliance	IP54, 
Specials	Customized versions, more light colours or color renderings on request

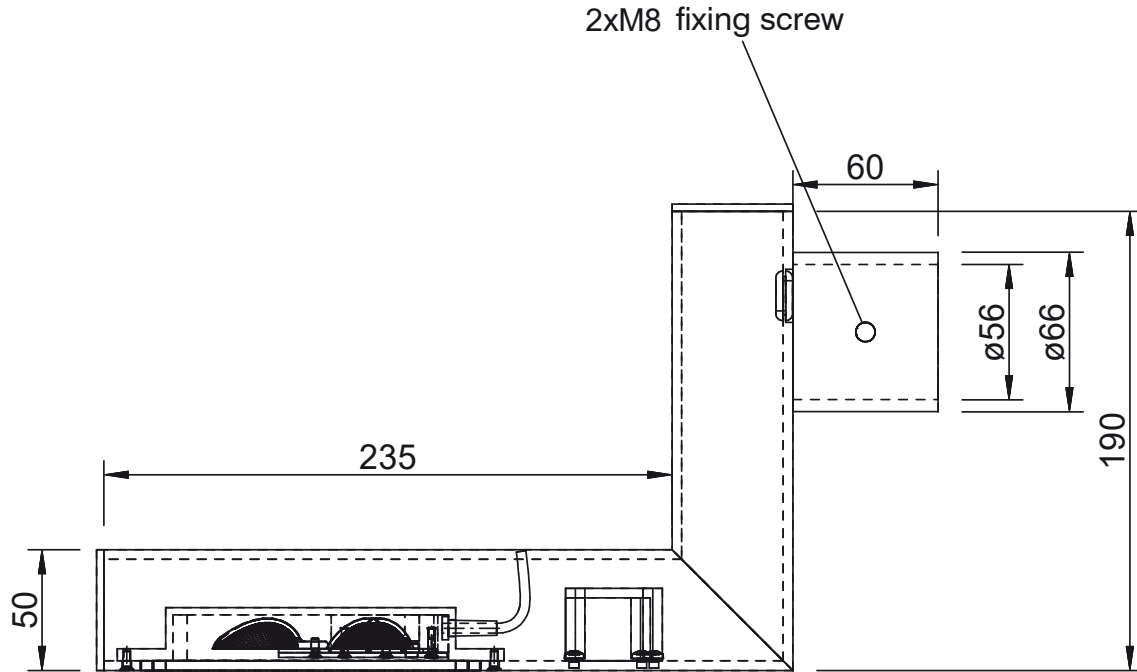

EVG on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution for one luminaire	Light colour	Colour rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1-10 V, DALI, Push	A 3350 A 2780 XX	9016
		CRI 90	1-10 V, DALI, Push	A 3350 A 2790 XX	9016
	3000 K	CRI 80	1-10 V, DALI, Push	A 3350 A 3080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 3350 A 3090 XX	9016
	4000 K	CRI 80	1-10 V, DALI, Push	A 3350 A 4080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 3350 A 4090 XX	9016