
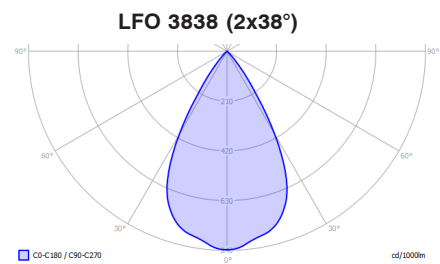
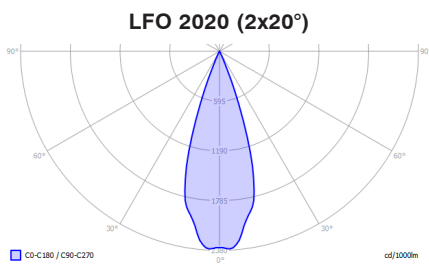


LFO 5x5

Recessed ceiling luminaire

Recessed Ceiling Luminaire with High-Power LEDs.
The luminaire is optimized for a uniform and glare-free illumination

Lamp	High-Power LEDs, 25 x 1,5 W
Lumen output	~5575 lm
Reflector	Optik PMMA
Electrical ballast	LED driver external
Dimming (options)	1–10 V, DALI, Push
Luminaire type, assembly	ceiling built-in, tool-free with tension springs
Dimensions, weight	L x B x H 265 x 265 x 55 mm
Cast, heat sink	sheet steel, extruded aluminium profile
Colour / finish	powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP 20, CE
Specials	customized versions on request

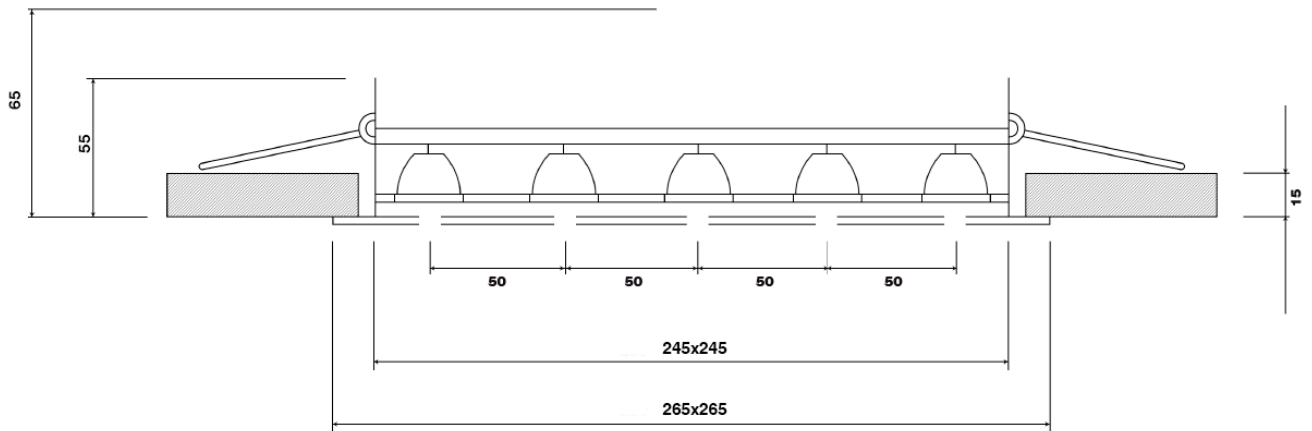

Article number: - - - - -

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
A = Recessed	5703	I = 2x20°	27 = 2700 K	70	EV = On/Off	0000 = None
		Q = 2x38°	30 = 3000 K	80	AV = 1-10V	1000 - 9018 = RAL
			40 = 4000 K	90	DA = Dali	
			57 = 5700 K		PH = Push	