





LINE sixtyfive ledil

Ceiling mounted

Linear surface luminaire with Power LEDs optimized for a uniform and glare-free illumination. Perfect as an energy-saving replacement of conventional lighting systems.

Lamp	High power LEDs, 1,5 W
Lumen output	ca. 100 lm/W
Lighting technology	optic pmma
Control gear	LED driver internal
Dimming (options)	1–10 V, DALI, Push
Luminaire type, assembly	Mounted
Dimensions	W= 48mm, H= 65mm, L=1000mm (typical)
Cast, heat sink	Extruded aluminium profile
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20, CE
Specials	Customized versions, more light colours or color renderings on request

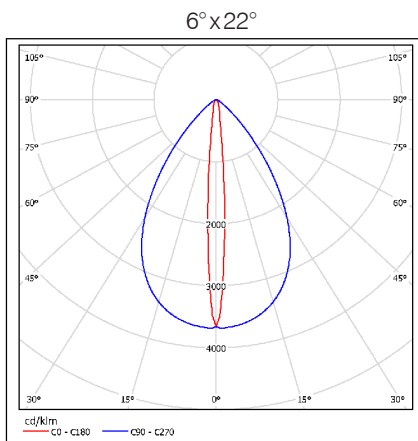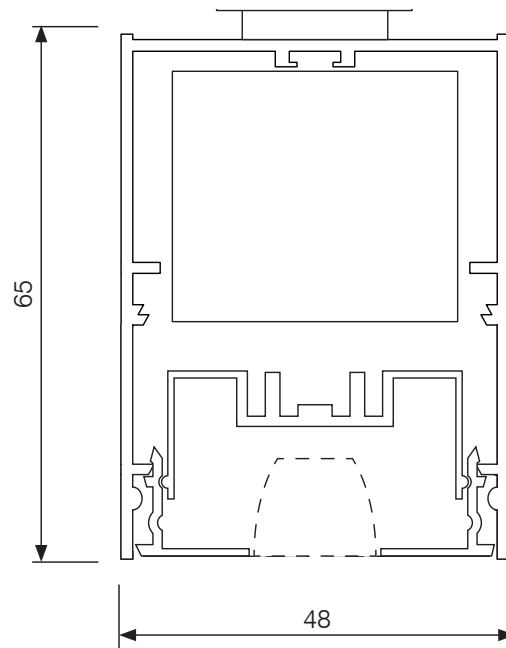

Article number: - - - - -

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
I = Mounted	6590 = Line65 Ledil	3 = 6°x22°	27 = 2700 K	70	EV = On/Off	0000 = None
			30 = 3000 K	80	AV = 1-10V	1000 - 9018 = RAL
			40 = 4000 K	90	DA = Dali	
			97 = 2700 K - 4000 K		PH = Push	
			98 = 2200 K - 5000 K			
			99 = 2700 K - 5700 K			