




MULTI mounted Downlight

Surface mounted luminaire

Surface-mounted downlight, available with different light characteristics. Suitable for general and accent lighting, as well as an energy-saving exchange of conventional spots.

Lamp	Bridgelux Vero 29
LED lumen output	5000 lm @ 1200 mA – 44 W
The reference values based on CRI 80, 3000 K	6700 lm @ 1400 mA – 47 W
Reflector	Aluminium coated polycarbonate
Control Gear	LED driver internal
Dimming (options)	1–10 V, Dali
Luminaire type, mounting	Surface-mounted, mounting panel
Dimensions	D 150 mm, H 320 mm
Cast, heat sink	Sheet steel powder coated, extruded aluminium profile anodized black
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20 (optional IP54), CE
Specials	Customized versions, more light colours or color renderings on request

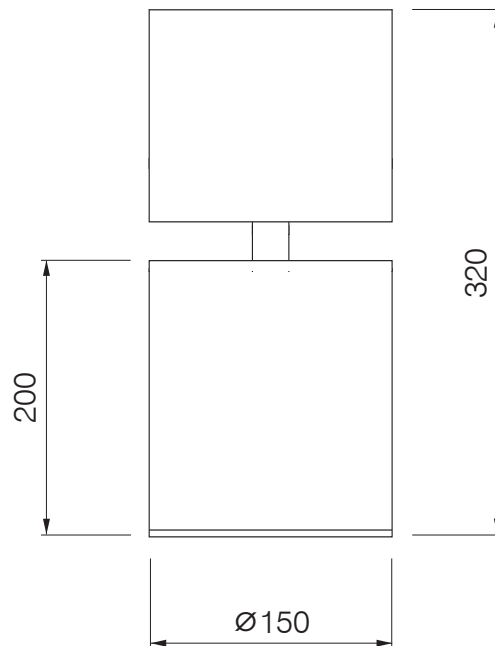

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
<p>2x15°</p> <p>90° 90°</p> <p>60° 60°</p> <p>30° 30°</p> <p>0°</p> <p>cd / 1000 lm</p>	3000 K	CRI 80	on/off	K 338R G 3080 EV 9016	
			1-10 V	K 338R G 3080 AV 9016	
			Dali	K 338R G 3080 DA 9016	
			on/off	K 338R G 3090 EV 9016	
			1-10 V	K 338R G 3090 AV 9016	
			Dali	K 338R G 3090 DA 9016	
<p>2x25°</p> <p>90° 90°</p> <p>60° 60°</p> <p>30° 30°</p> <p>0°</p> <p>cd / 1000 lm</p>	3000 K	CRI 80	on/off	K 338R K 3080 EV 9016	
			1-10 V	K 338R K 3080 AV 9016	
			Dali	K 338R K 3080 DA 9016	
			on/off	K 338R K 3090 EV 9016	
			1-10 V	K 338R K 3090 AV 9016	
			Dali	K 338R K 3090 DA 9016	
<p>2x35°</p> <p>90° 90°</p> <p>60° 60°</p> <p>30° 30°</p> <p>0°</p> <p>cd / 1000 lm</p>	3000 K	CRI 80	on/off	K 338R P 3080 EV 9016	
			1-10 V	K 338R P 3080 AV 9016	
			Dali	K 338R P 3080 DA 9016	
			on/off	K 338R P 3090 EV 9016	
			1-10 V	K 338R P 3090 AV 9016	
			Dali	K 338R P 3080 DA 9016	