



| | | |
|----------------------------|---|------------------------------------|
| OPTIONAL DALI | DIMMABLE C | NO FLICKER NO NOISE |
| | Custom Solution ON REQUEST | IP 65 |
| Made in Germany | | |


| | |
|---|---------------------------------|
| Lichtpunktabstand/Light point distance: | n/a |
| Treiber/Driver: | Integriert/Integrated |
| Leistung/Wattage: | 18W – 36W |
| Lichtstrom/Luminous Flux: | 2106 lm – 3834 lm |
| Lichtverteilung/Beam angle: | asymmetrisch/asymmetric |
| Wirkungsgrad/Efficiency: | >85% |
| Farbtemperatur/Color Temperature: | 2700K – 5700K |
| CRI: | >80, >90 |
| Schutzklasse/Protection Class: | I |
| Schutzart/IP-Protection: | IP65 |
| Oberfläche Gehäuse/Casing Finish: | Pulverbeschichtet/Powder Coated |
| Sonderausführung/Custom versions: | Auf Anfrage/On request |

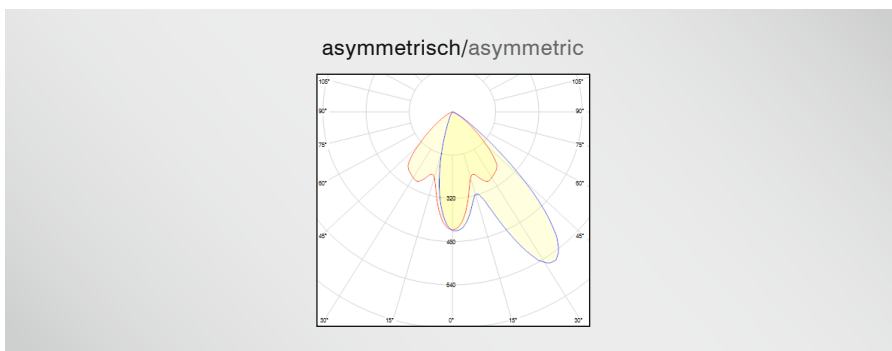

MONO



PRAEZISA 3x6



| Produkt ID: | Verbrauch + Lichtstrom/Wattage + Luminous Flux | | |
|-------------|--|---------------|-------------|
| | 181 = 18x1W | 185 = 18x1,5W | 182 = 18x2W |
| 2140 | 2106 lm | 2880 lm | 3834 lm |

Weitere Sonderausführungen auf Anfrage / Custom solutions on request



ARTIKELNUMMER / ARTICLE NUMBER:



| Produktkennung Product ID | Verbrauch Wattage | Treiber Driver | Abstrahlwinkel Beam Angle | Farbtemperatur Color Temperature | CRI CRI | Farbe Color Finish | Extras Accessories |
|------------------------------|----------------------|----------------------|--------------------------------------|-------------------------------------|---------------|------------------------|-----------------------|
| 2140 | 181 = 18x1W | X = Ohne/None | A = Asymmetrisch / Asymmetric | 27 = 2700K | 8 = 80 | 01 = RAL 9016 ○ | X = Ohne/None |
| | 185 = 18x1,5W | Y = DALI | | 30 = 3000K | 9 = 90 | 02 = RAL 9006 ● | |
| | 182 = 18x2W | Z = On/Off | | 35 = 3500K | | 03 = RAL 9005 ● | |
| | | | | 40 = 4000K | | 04 = RAL 7016 ● | |
| | | | | 50 = 5000K* | | 05 = DB703 ● | |
| | | | | 57 = 5700K* | | | |

Andere Farbkombinationen oder Temperaturen möglich/Other color combinations or temperatures possible

*5000K und 5700K nur CRI 80/ 5000K and 5700K only CRI 80