


Pollari 2x5

Outdoor luminaire

Outdoor luminaire with power LEDs. The luminaire is optimized for a zonal illumination of sidewalks and open spaces. The 10 LED modules have a specific light distribution. Both LED units independently tiltable vertical up 20°



Lamp	Power LEDs, 10x 2 W, light point spacing 25 mm
LED lumen output	2700 K, CRI 80, 1920 lm @ 700 mA 3000 K, CRI 80, 2080 lm @ 700 mA
Light technology	Optik PMMA,
Control gear	LED Driver internal
Dimming (options)	1–10 V , DALI, Push
Luminaire type, assembly	Bollard luminaire, floor-mounted with base plate
Dimensions	TxBxH 50x 180x1000 mm, base plate: 130x260 mm
Cast, heat sink	Sheet steel, aluminium
Colour / finish	Powder coated, DB 703,RAL 9006 FS,RAL 9010 (other RAL colors optional)
Protection marking, compliance	IP67, CE
Specials	Customized versions, more light colours or colour renderings on request

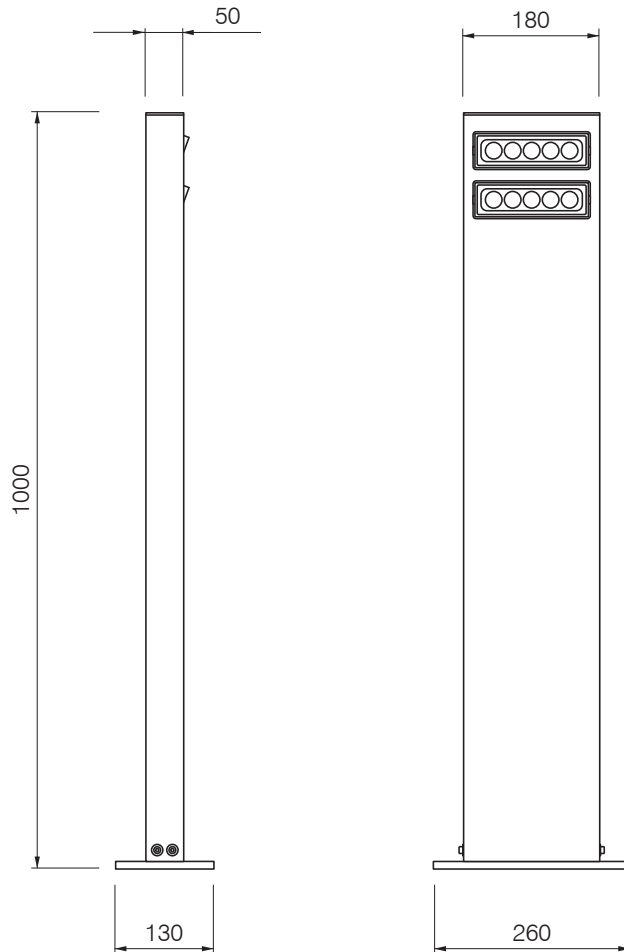

EVG on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL	
	2700 K	CRI 80	1-10 V, DALI, Push	J 8511 2 2780 XX B703		
					J 8511 2 2780 XX 9006	
					J 8511 2 2780 XX 9010	
	3000 K	CRI 90	1-10 V, DALI, Push	J 8511 2 2790 XX B703		
					J 8511 2 2790 XX 9006	
					J 8511 2 2790 XX 9010	
3000 K	CRI 80	1-10 V, DALI, Push	J 8511 2 3080 XX B703			
				J 8511 2 3080 XX 9006		
				J 8511 2 3080 XX 9010		
3000 K	CRI 90	1-10 V, DALI, Push	J 8511 2 3090 XX B703			
				J 8511 2 3090 XX 9006		
			J 8511 2 3090 XX 9010			