




ROUND Downlight mono

Recessed ceiling luminaire

Downlight with power LEDs for general lighting. The lamp is optimized for a flat and glare-free illumination of VDU workstation according to DIN EN 12464. The high-gloss reflector system prevents direct insight into the light source.

Lamp	30x 1,5W Power LEDs
LED lumen output	3000K (30x 160 lm) = 4800 lm
Reflector	Reflector: aluminium coated polycarbonate
Control gear	LED driver internal
Dimming (Options)	1–10 V, DALI, Push
Luminaire type, assembly	Recessed ceiling, tool-free with tension springs
Dimensions	D 275 mm, H 47 mm, DA 265 mm, ET 70 mm
Cast, heat sink	Aluminium powder coated, extruded aluminium profile anodized black
Colour / finish	Powder coated, RAL 9016 (other RAL colours optional)
Protection marking, compliance	IP 20, CE
Specials	Customized versions, more light colours or colour renderings on request

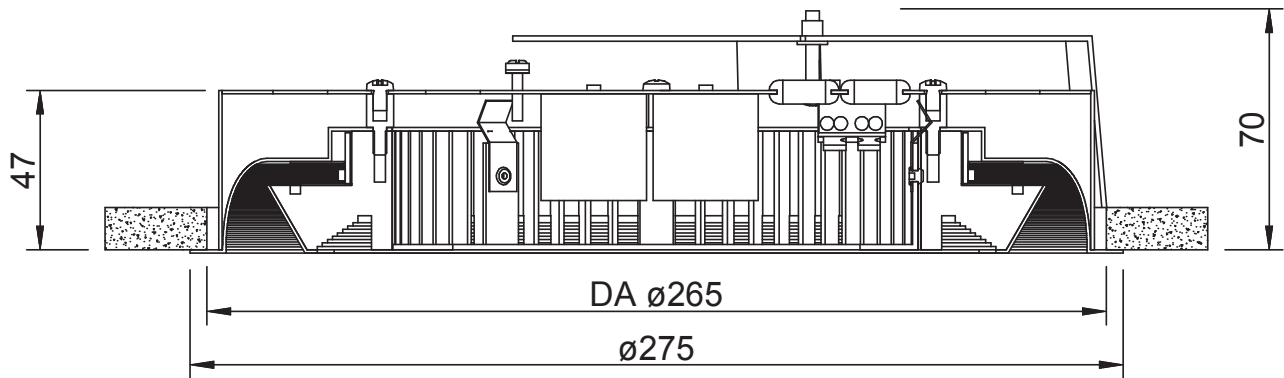

EVG on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Colour rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1-10 V, DALI, Push	A 3030 V 2780 XX	9016
		CRI 90	1-10 V, DALI, Push	A 3030 V 2790 XX	9016
	3000 K	CRI 80	1-10 V, DALI, Push	A 3030 V 3080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 3030 V 3090 XX	9016
	4000 K	CRI 80	1-10 V, DALI, Push	A 3030 V 4080 XX	9016
		CRI 90	1-10 V, DALI, Push	A 3030 V 4090 XX	9016