



SIMNA Columnlight


Outdoor luminaire

Columnlight with high power LEDs optimized for uniform and glare-free illumination of streets and open places.


The three-lens system with a particularly large optical surface of the lens optical system, allows a very precise light steering with reduced wastage and low glare.



Lamp	Power LEDs, 3x (LED-Modul 3x LED 19,8 W)
Lumen output	3x 1750 lm @ 600 mA
Lighting technology	Typ DP 31, 97°× 140°, PMMA
Control gear	LED driver internal
Dimming (options)	DALI
Luminaire type, assembly	Columnlight, street/ground-plate
Dimensions	HxTxB 6120x1440x200 mm, Fußplatte 400x400 mm or groundplate approx. 800 mm
Cast, heat sink	Extruded aluminum profile, steel
Colour / finish	Powder coated, DB 703 (other RAL colors optional)
Protection marking, compliance	IP67, CE
Specials	Customized versions, more light colours or color renderings on request

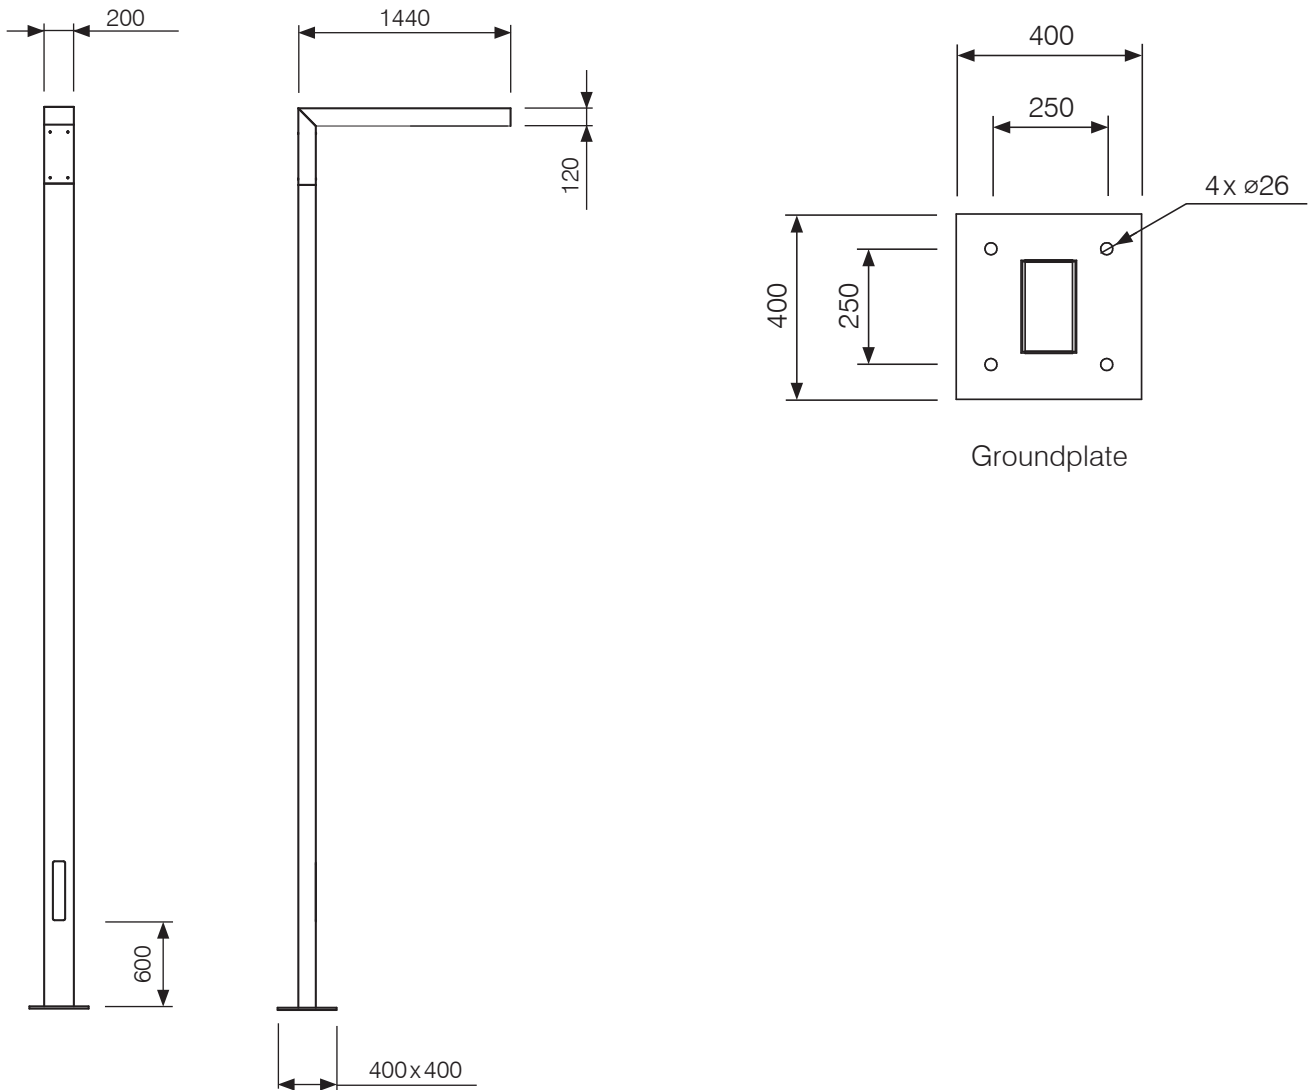

Light distribution

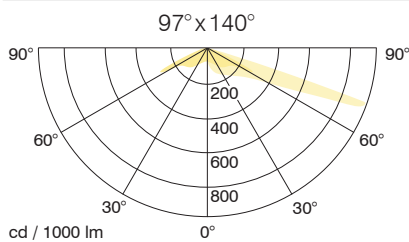

Light colour

Colour rendering

Control gear

Order No.

+RAL

2700 K	CRI 80	DALI	V 8109 A 2780 DA 7035
	CRI 90	DALI	V 8109 A 2790 DA 7035
3000 K	CRI 80	DALI	V 8109 A 3080 DA 7035
	CRI 90	DALI	V 8109 A 3090 DA 7035
4000 K	CRI 80	DALI	V 8109 A 4080 DA 7035
5000 K	CRI 75	DALI	V 8109 A 5075 DA 7035