







## SNAKE

Surface mounted

Free-form surface-mounted luminaire with individually orientable light modules. The light can be extended.



Lamp	20 x Tuneable white (2200K–4500K) per meter
Lichtstrom	2200 K = 1800 lm/m, 4500 K = 2100 lm/m
Vatage	ca. 20W/m each color @ 350 mA, total: 40W/m
Lighting technology	Plastic lens
Control gear	DALI-LED driver external
Luminaire type, assembly	Surface mounted
Dimensions	Single light: B = 43 mm, H = 50 mm, total length optional
Cast, heat sink	Aluminium
Colour / finish	Powder coating, RAL 9016 fs (optional RAL color as desired )
Protection marking, compliance	IP20, <b>CE</b>
Specials	Customized versions, more light colours or color renderings on request

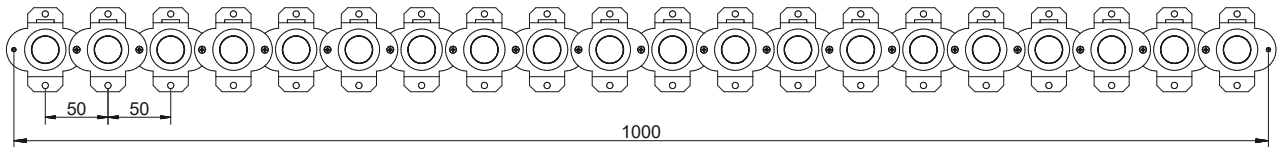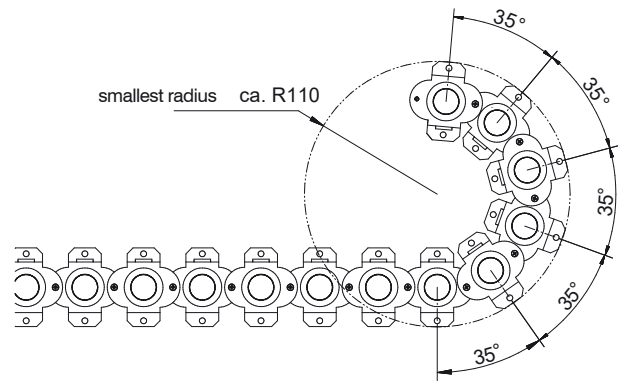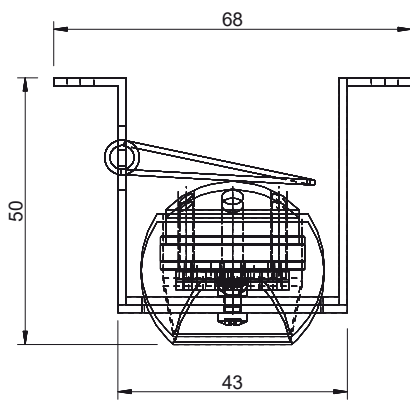

Article Number:

Luminaire type	Product ID	Beam angle / Reflector	Color temperature <sup>(1)</sup>	CRI	Driver	Color
R = Flexible	4050	R = 28°	27 = 2700K	80	00 = none	9016 (White)
			30 = 3000K	90	DA = DALI	9005 (Black)
			40 = 4000K			9006 (AluSilver)
			50 = 5000K			
			57 = 5700K			
			91 = 2200–3000K			
			87 = 2200–4500K			
			99 = 2700–5000K			

<sup>(1)</sup> Other color temperatures or other combinations of color temperatures possible