





## SQUARE twentyfive


### Ceiling mounted luminaire


Ceiling mounted lamp with high-power LEDs. The lamp is optimized for a flat and glare-free illumination of computer workstations. Perfectly as an energetic exchange of conventional general lighting.

Reflector detail in original size. Outlet: 15x15 mm. 2x35° and 2x45° reflector VDU workstation suitable acc. DIN EN 12464-1:2011

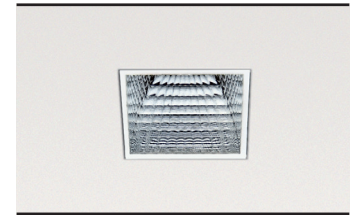

Lamp	High-power LEDs, 10x 2 W
Lumen output	approx. 1220 lm
Lighting technology	Reflector Plastic aluminized, with a micro-faceting
Control gear	LED driver internally
Dimming (options)	1-10V, DALI, Push
Luminaire type, assembly	Ceiling mounted
Dimensions	HxWxD 25x250x320 mm
Cast, heat sink	Extruded aluminum profile
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20, 
Specials	Special design or other light colors / CRI optional

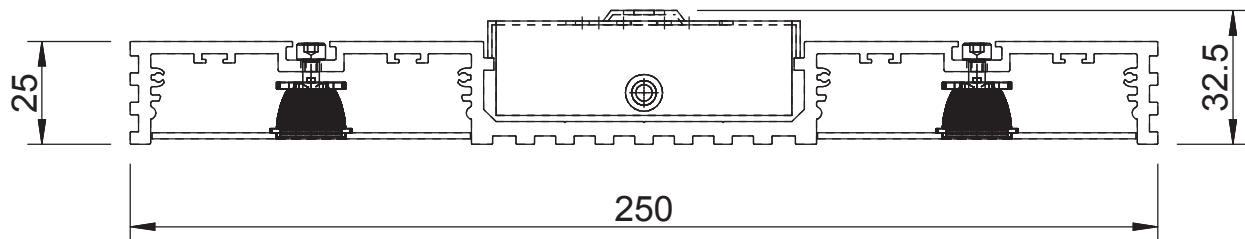

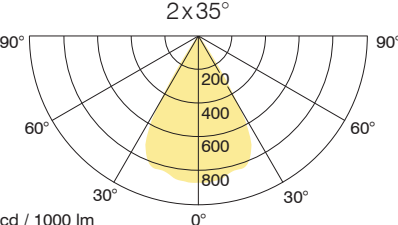Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
 <p>2x35°</p> <p>90° 90°</p> <p>60° 60°</p> <p>30° 30°</p> <p>0°</p> <p>cd / 1000 lm</p>	2700 K	CRI 80	dimmable	I 2710 P 2780 PH 9016	
		CRI 90	dimmable	I 2710 P 2790 PH 9016	
	3000 K	CRI 80	dimmable	I 2710 P 3080 PH 9016	
		CRI 90	dimmable	I 2710 P 3090 PH 9016	
	4000 K	CRI 80	dimmable	I 2710 P 4080 PH 9016	
	5000 K	CRI 75	dimmable	I 2710 P 5075 PH 9016	
 <p>2x45°</p> <p>90° 90°</p> <p>60° 60°</p> <p>30° 30°</p> <p>0°</p> <p>cd / 1000 lm</p>	2700 K	CRI 80	dimmable	I 2710 T 2780 PH 9016	
		CRI 90	dimmable	I 2710 T 2790 PH 9016	
	3000 K	CRI 80	dimmable	I 2710 T 3080 PH 9016	
		CRI 90	dimmable	I 2710 T 3090 PH 9016	
	4000 K	CRI 80	dimmable	I 2710 T 4080 PH 9016	
	5000 K	CRI 75	dimmable	I 2710 T 5075 PH 9016	