







SQUARE twentyfive pendulum

pendulum luminaire

Reflector detail in
original size.
Outlet: 15x15 mm



Lamp	High-power LEDs, 20x1,5 W direct, 10x1,5 W indirect
LED lumen output	approx. 100 lm/W
Reflector	Reflector: aluminium coated polycarbonate, micro faceted
Control gear	LED driver external
Dimming (options)	1-10V, DALI, Push
Luminaire type, assembly	pendulum
Dimensions	HxW 25x1200 mm
Cast, heat sink	Sheet steel, extruded aluminium profile anodized
Colour/finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP20, CE
Specials	Customized versions, more light colours or colour renderings on request

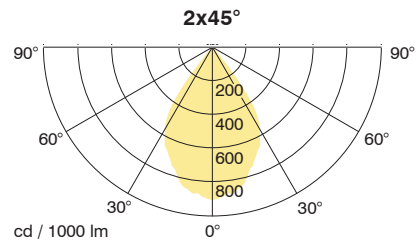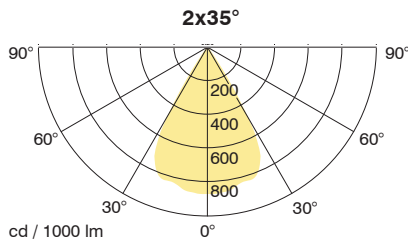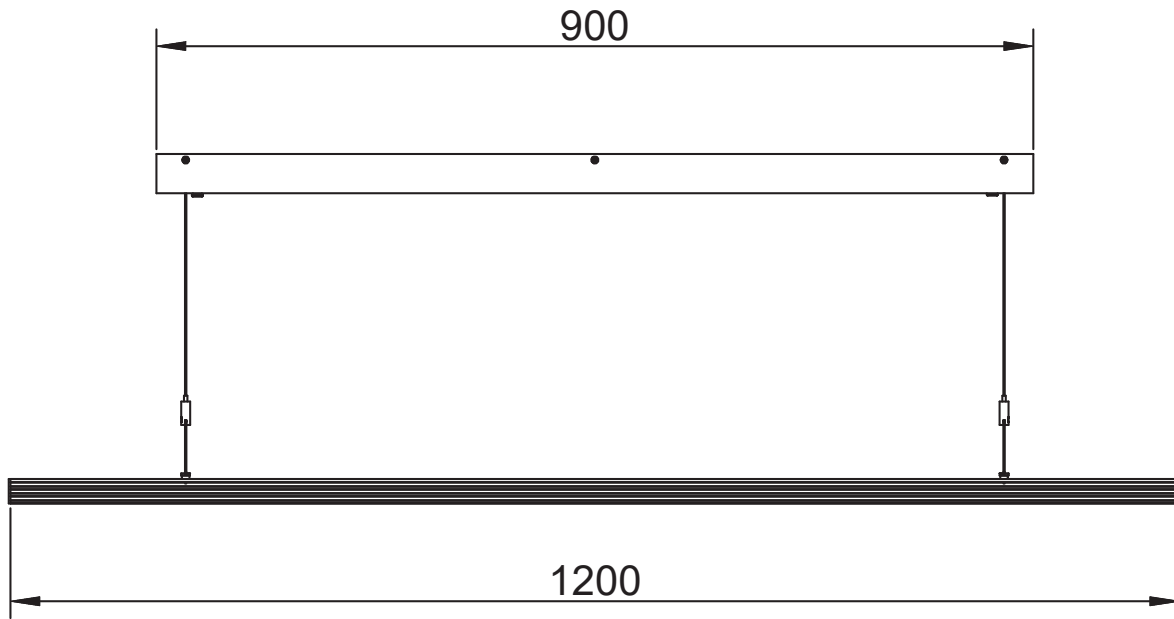

Article number: _____

Luminaire type	Identification	Reflector / Beam angle	Color temperature	CRI	Driver	RAL
Q = Pendulum	2700	P = 2x35°	27 = 2700 K	70	EV = On/Off	0000 = None
		T = 2x45°	30 = 3000 K	80	AV = 1-10V	1000 - 9018 = RAL
			40 = 4000 K	90	DA = Dali	
			57 = 5700 K		PH = Push	
			98 = 2200 K - 5000 K			
			99 = 2700 K - 5700 K			