




## SUPER-SPOT 4x

### Semi-Recessed Downlight

Semi-recessed downlight with Power LEDs. The spot is optimized for glare-free accent lighting. Perfect as energy-saving exchange for low-voltage spots.

Lamp	Power LEDs, 4x 2 W
LED lumen output	2700 K, CRI 80, 892 lm @ 700 mA 3000 K, CRI 80, 920 lm @ 700 mA
Light technology	Optics: PMMA
Control gear	LED driver external
Dimming (Options)	1–10 V, DALI, Push
Luminaire type, mounting	Semi-recessed, tool-free with tension springs
Dimensions	WxDxH 105x105x55 mm, CO 90x90, MD 80 mm
Cast, heat sink	Sheet steel
Colour / finish	Powder coated, RAL 9016 (other RAL colors optional)
Protection marking, compliance	IP65, <b>CE</b>
Specials	Customized versions, more light colours or color renderings on request

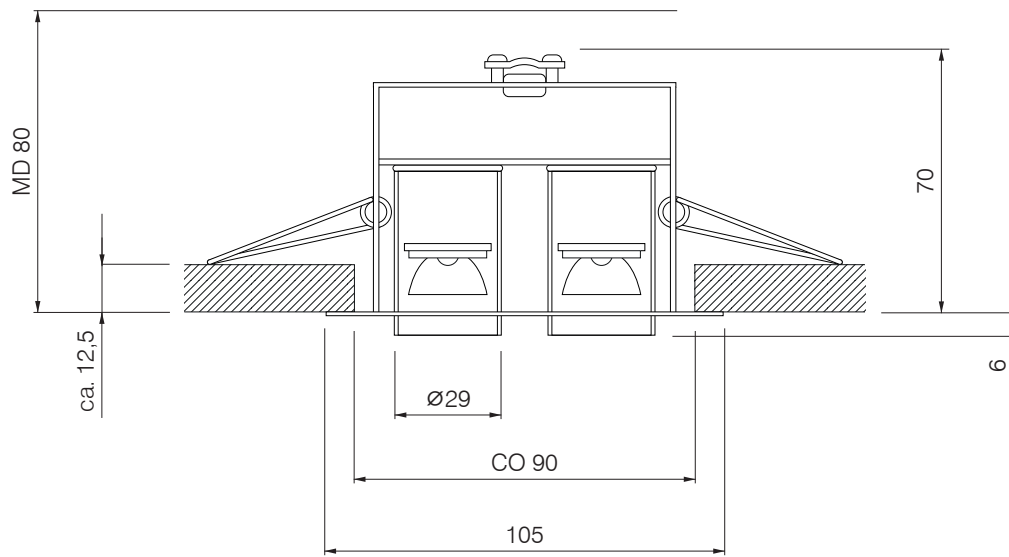

EVG on/off = EV

1-10 V = AV

Dali = DA

Push = PH

Please replace the item number placeholder XX with the listed operating device options:

Light distribution	Light colour	Color rendering	Control gear	Order No.	+RAL
	2700 K	CRI 80	1-10 V, DALI, Push	E 4004 E 2780 XX B703	
				E 4004 E 2780 XX 9006	
				E 4004 E 2780 XX 9010	
	3000 K	CRI 80	1-10 V, DALI, Push	E 4004 E 3080 XX B703	
				E 4004 E 3080 XX 9006	
				E 4004 E 3080 XX 9010	
	2700 K	CRI 80	1-10 V, DALI, Push	E 4004 F 2780 XX B703	
				E 4004 F 2780 XX 9006	
				E 4004 F 2780 XX 9010	
	3000 K	CRI 80	1-10 V, DALI, Push	E 4004 F 3080 XX B703	
				E 4004 F 3080 XX 9006	
				E 4004 F 3080 XX 9010	
	2700 K	CRI 80	1-10 V, DALI, Push	E 4004 M 2780 XX B703	
				E 4004 M 2780 XX 9006	
				E 4004 M 2780 XX 9010	
	3000 K	CRI 80	1-10 V, DALI, Push	E 4004 M 3080 XX B703	
				E 4004 M 3080 XX 9006	
				E 4004 M 3080 XX 9010	