





<p>OPTIONAL</p>	<p>DIMMABLE</p>	<p>NO FLICKER NO NOISE</p>
	<p>Custom Solution ON REQUEST</p>	<p>IP 20</p>
<p>Made in Germany</p>	<p>OPTIONAL</p> <p>IP54</p>	

Lichtpunktabstand/Light point distance:	n.a.
Treiber/Driver:	Extern/External
Leistung/Wattage:	14 W/m
Lichtstrom/Luminous Flux:	1680 lm/m
Lichtverteilung/Beam angle:	diffus/diffuse
Wirkungsgrad/Efficiency:	>85%
Farbtemperatur/Color Temperature:	3000K
CRI:	>90
Schutzklasse/Protection Class:	I
Schutzart/IP-Protection:	IP20, IP54 optional CE
Oberfläche Gehäuse/Casing Finish:	Alu natur eloxiert
Sonderausführung/Custom versions:	Auf Anfrage/On request

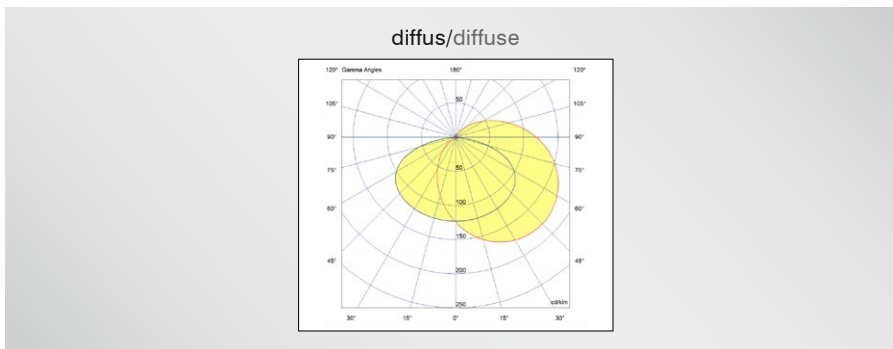


MONO



WALLWASHER TRIANGLE PENDEL/PENDANT

Lichtpunktabstand 25mm/Light point distance 25mm

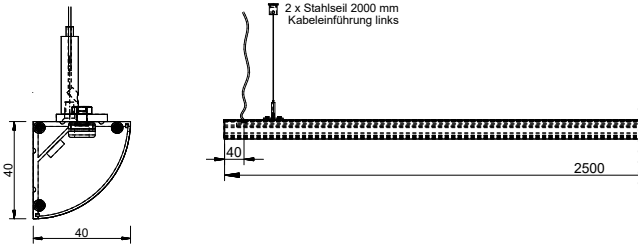

Produkt ID	Verbrauch + Lichtstrom / Wattage + Luminous Flux
	014 = 14W/m
1610	1680 lm/m

Weitere Sonderausführungen auf Anfrage / Custom solutions on request



ARTIKELNUMMER / ARTICLE NUMBER:

□ □ □ □ □ □ □ □ □ □ □ □ □ □

Produktkennung Product ID	Verbrauch Wattage	Treiber Driver	Abstrahlwinkel Beam Angle	Farbtemperatur Color Temperature	CRI CRI	Farbe Color Finish	Extras Accessories
1610	014 = 14W	X = Ohne/None	D = diffus/ diffuse	27 = 2700K	9 = 90	01 = RAL 9016 ○	X = Ohne/None
		Y = DALI		30 = 3000K		02 = RAL 9006 ●	
		Z = On/Off		35 = 3500K		03 = RAL 9005 ●	
		40 = 4000K		04 = RAL 7016 ●			
		50 = 5000K*		05 = DB703 ●			
		57 = 5700K*		0X = Ohne/None			

Andere Farbkombinationen oder Temperaturen möglich/Other color combinations or temperatures possible

*5000K und 5700K nur CRI 80/ 5000K and 5700K only CRI 80