

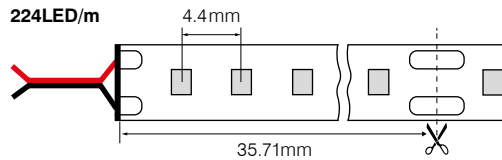
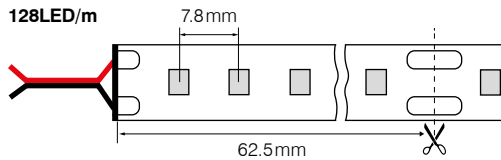


### 150LM/W 2835 LED STRIP

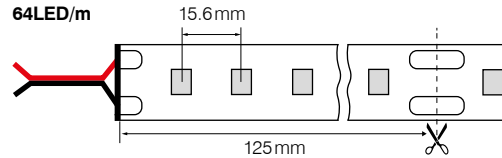

Abmessungen/Dimensions	5000mm
Leuchtmittel/Light source	SMD 2835
Lichtstrom /Luminous Flux	500 – 2000lm/m
Leistung/Wattage	3.7 – 13W/m
Anzahl LEDs/LED Qty	64, 128, 224LED/m
IP-Schutzartart/IP-Protection	IP20, IP67
Schutzklasse/Protection Class	III



Artikelnummer Article Number	IP IP	LED s/m LED s/m	CRI CRI	Teilungsmaß Cutting unit	Leistung Wattage	PCB Breite PCB Width	Farbe Color	Lichtstrom Luminous Flux
<b>Constant Current Strips</b>								
P2835Y224CH1-27	IP20	224LED/m	CRI>90	35.71mm	13W/m	12mm	2700K	1750lm/m
P2835Y224CH1-30	IP20	224LED/m	CRI>90	35.71mm	13W/m	12mm	3000K	1850lm/m
P2835Y224CH1-40	IP20	224LED/m	CRI>90	35.71mm	13W/m	12mm	4000K	1950lm/m
P2835Y224CH1-65	IP20	224LED/m	CRI>90	35.71mm	13W/m	12mm	6500K	2000lm/m
P2835Z224CH1-27	IP67	224LED/m	CRI>90	35.71mm	13W/m	14mm	2700K	1700lm/m
P2835Z224CH1-30	IP67	224LED/m	CRI>90	35.71mm	13W/m	14mm	3000K	1800lm/m
P2835Z224CH1-40	IP67	224LED/m	CRI>90	35.71mm	13W/m	14mm	4000K	1900lm/m
P2835Z224CH-65	IP67	224LED/m	CRI>90	35.71mm	13W/m	14mm	6500K	1950lm/m
P2835Y128CH1-27	IP20	128LED/m	CRI>90	62.5mm	7.5W/m	12mm	2700K	1000lm/m
P2835Y128CH1-30	IP20	128LED/m	CRI>90	62.5mm	7.5W/m	12mm	3000K	1050lm/m
P2835Y128CH1-40	IP20	128LED/m	CRI>90	62.5mm	7.5W/m	12mm	4000K	1130lm/m
P2835Y128CH1-65	IP20	128LED/m	CRI>90	62.5mm	7.5W/m	12mm	6500K	1170lm/m
P2835Z128CH1-27	IP67	128LED/m	CRI>90	62.5mm	7.5W/m	14mm	2700K	950lm/m
P2835Z128CH1-30	IP67	128LED/m	CRI>90	62.5mm	7.5W/m	14mm	3000K	1000lm/m
P2835Z128CH1-40	IP67	128LED/m	CRI>90	62.5mm	7.5W/m	14mm	4000K	1080lm/m
P2835Z128CH1-65	IP67	128LED/m	CRI>90	62.5mm	7.5W/m	14mm	6500K	1120lm/m
P2835Y064CH1-27	IP20	64LED/m	CRI>90	125mm	3.7W/m	10mm	2700K	500lm/m
P2835Y064CH1-30	IP20	64LED/m	CRI>90	125mm	3.7W/m	10mm	3000K	530lm/m
P2835Y064CH1-40	IP20	64LED/m	CRI>90	125mm	3.7W/m	10mm	4000K	550lm/m
P2835Y064CH1-65	IP20	64LED/m	CRI>90	125mm	3.7W/m	10mm	6500K	570lm/m
P2835Z064CH1-27	IP67	64LED/m	CRI>90	125mm	3.7W/m	12mm	2700K	490lm/m
P2835Z064CH1-30	IP67	64LED/m	CRI>90	125mm	3.7W/m	12mm	3000K	520lm/m
P2835Z064CH1-40	IP67	64LED/m	CRI>90	125mm	3.7W/m	12mm	4000K	540lm/m
P2835Z064CH1-65	IP67	64LED/m	CRI>90	125mm	3.7W/m	12mm	6500K	560lm/m