


RGBW 5050 LED STRIP (SEPERATE WHITE LED)



Abmessungen/Dimensions	5000mm
Leuchtmittel/Light source	SMD 5050
Lichtstrom /Luminous Flux	53 – 750lm/m
Leistung/Wattage	14.4W/m
Anzahl LEDs/LED Qty	60LED/m
IP-Schutzart/IP-Protection	IP20, IP67
Schutzklasse/Protection Class	III

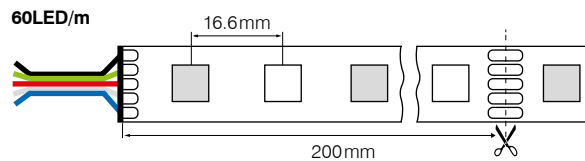

Artikelnummer Article Number	IP IP	LEDs/m LED s/m	CRI CRI	Teilungsmaß Cutting unit	Leistung Wattage	PCB Breite PCB Width	Farbe Color	Lichtstrom Luminous Flux
Constant Voltage Strips								
P5050Y060R3-22	IP20	60LED/m	–	200mm	14.4W/m	12mm	RGB+2200K	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, 2200K: 650lm/m
P5050Y060R3-27	IP20	60LED/m	–	200mm	14.4W/m	12mm	RGB+2700K	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, 2700K: 675lm/m
P5050Y060R3-30	IP20	60LED/m	–	200mm	14.4W/m	12mm	RGB+3000K	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, 3000K: 700lm
P5050Y060R3-40	IP20	60LED/m	–	200mm	14.4W/m	12mm	RGB+4000K	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, White: 720lm/m
P5050Y060R3-60	IP20	60LED/m	–	200mm	14.4W/m	12mm	RGB+6000K	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, White: 750lm/m
P5050Y060R3-A	IP20	60LED/m	–	200mm	14.4W/m	12mm	RGB+Amber	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, Amber: 180lm/m
P5050Z060R3-22	IP67	60LED/m	–	200mm	14.4W/m	14mm	RGB+2200K	Red: 63lm/m, Green: 175lm/m, Blue: 53lm/m, 2200K: 630lm/m
P5050Z060R3-27	IP67	60LED/m	–	200mm	14.4W/m	14mm	RGB+2700K	Red: 63lm/m, Green: 175lm/m, Blue: 53lm/m, 2700K: 655lm/m
P5050Z060R3-30	IP67	60LED/m	–	200mm	14.4W/m	14mm	RGB+3000K	Red: 63lm/m, Green: 175lm/m, Blue: 53lm/m, 3000K: 680lm/m
P5050Z060R3-40	IP67	60LED/m	–	200mm	14.4W/m	14mm	RGB+4000K	Red: 63lm/m, Green: 175lm/m, Blue: 53lm/m, 4000K: 700lm/m
P5050Z060R3-60	IP67	60LED/m	–	200mm	14.4W/m	14mm	RGB+6000K	Red: 63lm/m, Green: 175lm/m, Blue: 53lm/m, 6000K: 730lm/m
P5050Z060R3-A	IP67	60LED/m	–	200mm	14.4W/m	14mm	RGB+Amber	Red: 65lm/m, Green: 180lm/m, Blue: 55lm/m, Amber: 175lm/m